

## Audimute® Acoustic Drop Ceiling Tile

### Available sizes :

- 2' x 2' | 2' x 4' (nominal sizes)

### Thickness :

- 1.5 in

### Color Options:

- Available in any Sherwin Williams color.

### Custom Options:

- Color

Manufactured and assembled in the U.S.A.



#### Acoustical Performance

- Absorption product
- NRC of .95
- Excellent for mid to high range frequencies absorption



#### Flammability

- Class A fire rated (ASTM E-84)



#### Material Composition

- Blend of recycled cotton and cellulose fibers
- Made with 1/10 of the energy required to make traditional fiberglass panels




#### Health

- Non-toxic
- Non-carcinogenic
- Low emission product




#### Installation Hardware

- Audimute Ceiling Adhesive
- Construction Adhesive

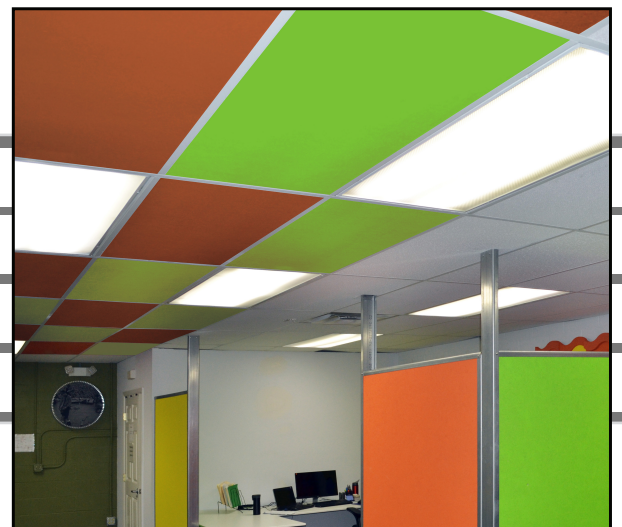

## Audimute® Ceiling Mount Tile

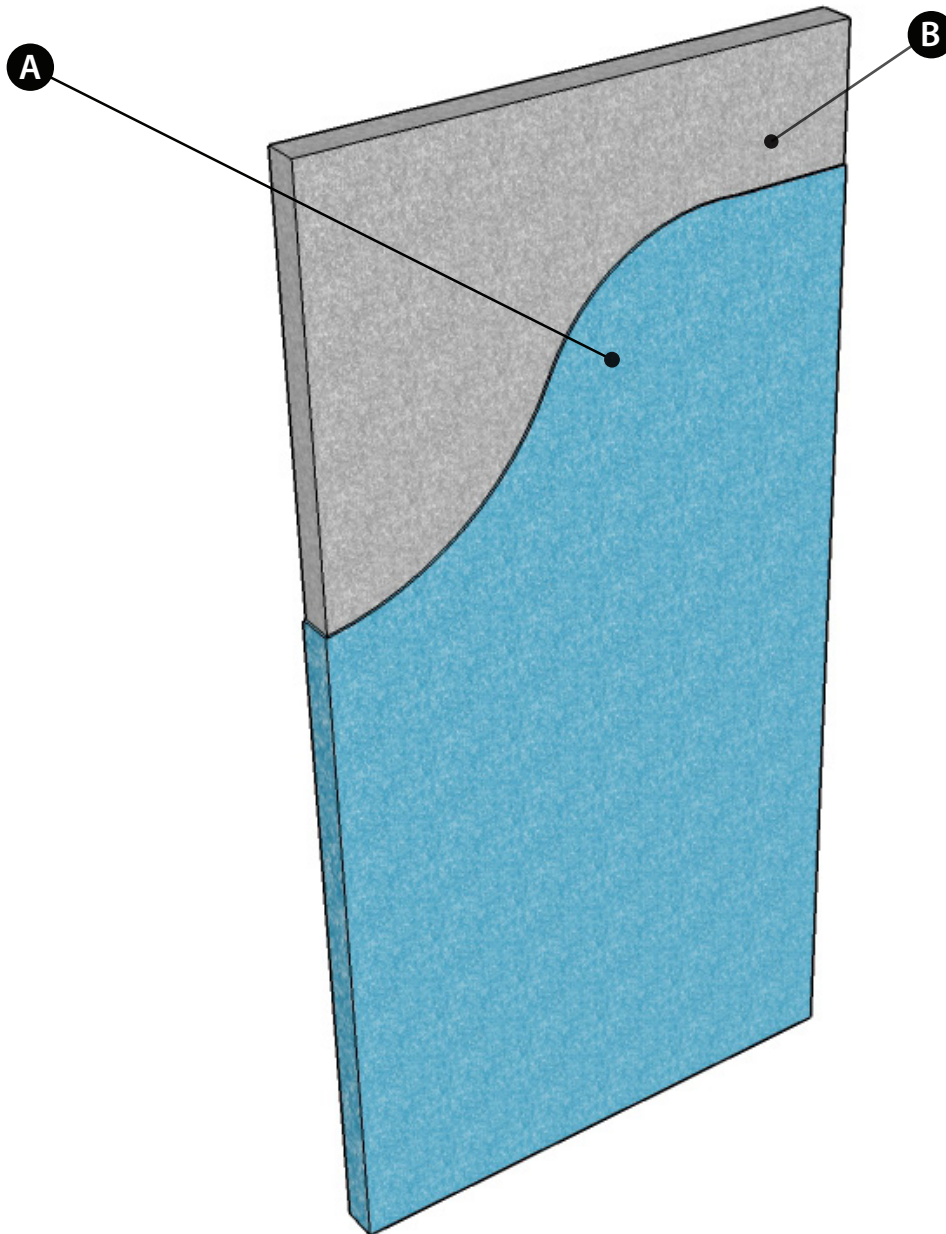

### Features:

- A AcustiColor®** - Accoustically transparent paint. Choose any Sherwin Williams color.
- B eco-C-tex® Absorption Material** - Composed of non-flammable recycled cotton and cellulose fibers. Does not contain fiberglass.

\* all components made and assembled in the U.S.A.