

Audimute® Ceiling Mount Tile

Available sizes :

- 1'x 1' | 1'x 2' | 1'x 3' | 1'x 4' | 2'x 2' | 2'x 3' | 2'x 4' | 3'x 3'

Available Thickness :

- 1.5 in
- 1 in
- .5 in

Color Options:

- Available in any Sherwin Williams color.

Custom Options:

- Size
- Shapes

Manufactured and assembled in the U.S.A.



Acoustical Performance

- Absorption product
- NRC of .55 - .95
- Excellent for mid to high range frequencies absorption



Flammability

- Class A fire rated (ASTM E-84)



Material Composition

- Blend of recycled cotton and cellulose fibers
- Made with 1/10 of the energy required to make traditional fiberglass panels



Health

- Non-toxic
- Non-carcinogenic
- Low emission product




Installation Hardware

- Audimute Ceiling Adhesive
- Construction Adhesive



Audimute® Ceiling Mount Tile

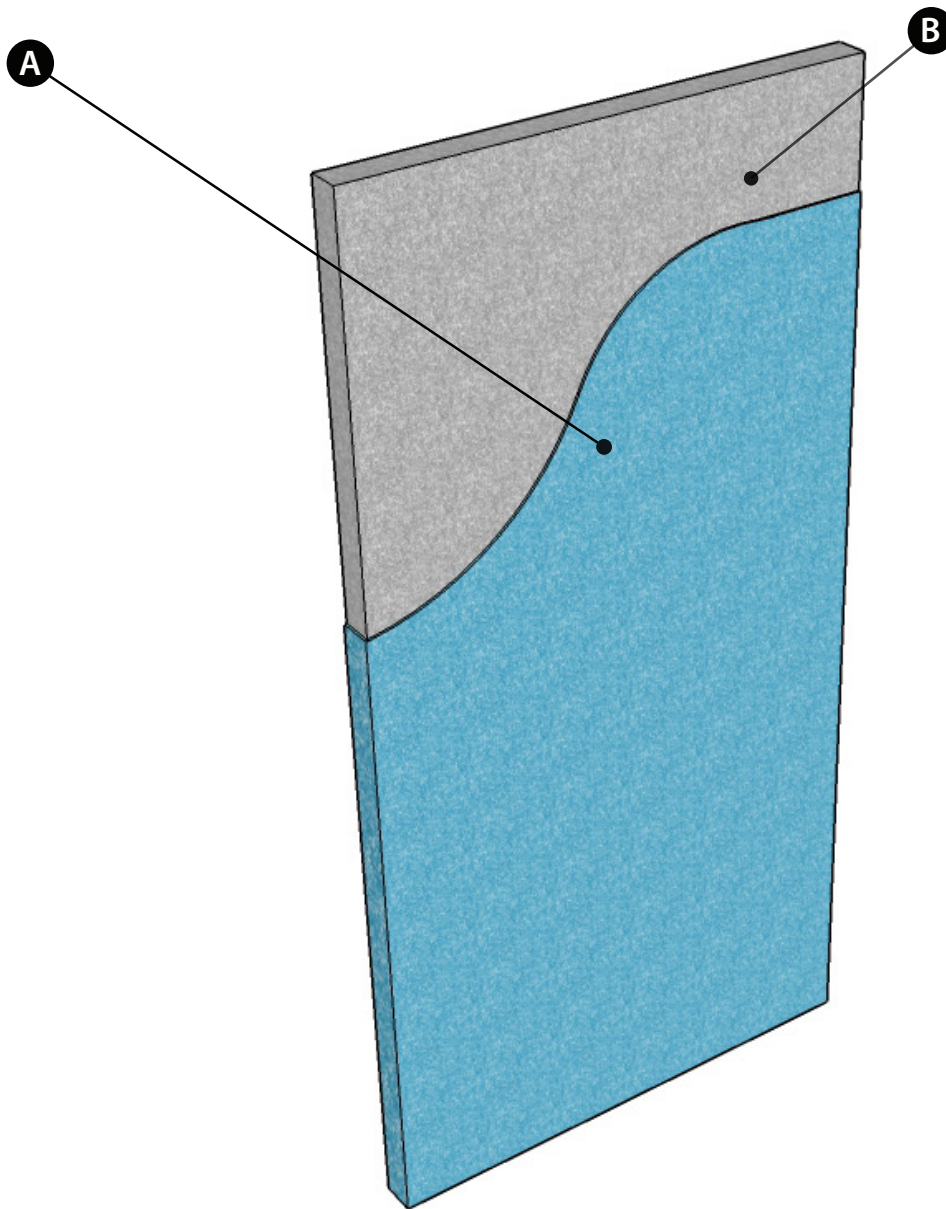

Features:

- A AcustiColor®** - Accoustically transparent paint. Choose any Sherwin Williams color.
- B eco-C-tex® Absorption Material** - Composed of non-flammable recycled cotton and cellulose fibers. Does not contain fiberglass.

* all components made and assembled in the U.S.A.