


TessaTiles

Patterned after your style..


TessaTiles combine aesthetics with acoustic performance. TessaTiles are a great echo absorber that are made with our eco-C-tex® eco-friendly absorption material. Choose from 11 different tiles or contact us to help you create you own pattern. These tiles were designed to work singularly as spot treatment or to be grouped together to cover a larger area.

TessaTiles are available in several standard color options but we can also accomadate custom color requests.

Bring your wall art ideas to life by adding TessaTiles to any space. They are perfect for adding an artistic touch to any space in addition to promoting a positive acoustic environment. TessaTiles are great for commercial spaces and residential spaces a like.

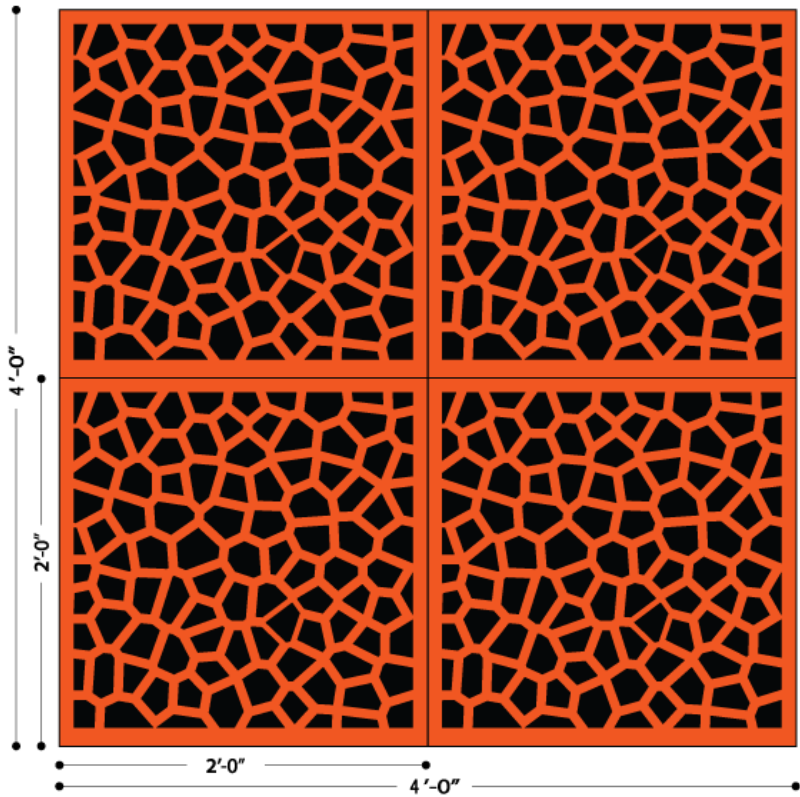


Elevation: TessaTile 4 Pack Grouping (Custom Sizes Available)

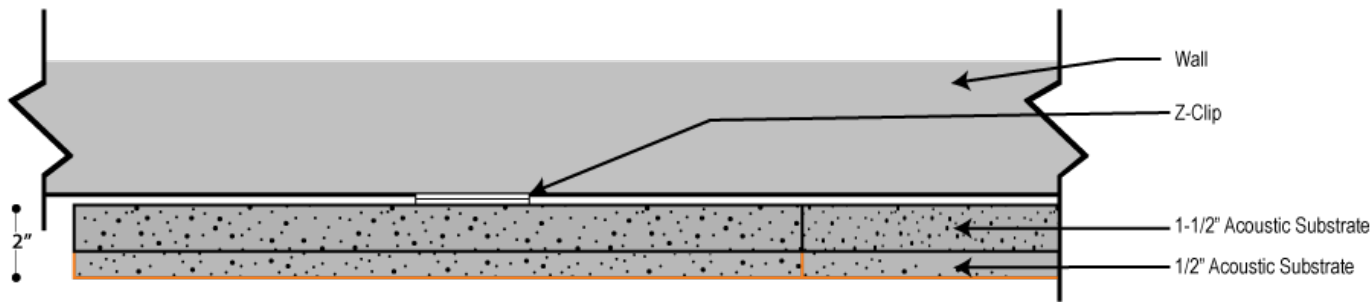


Plan View TessaTile


TESSATILE PATTERNS



Cellular




Chinese lattice



Circle Dispersion




Floral



Leaf Vein




Maze




Polygon




Highways



Running Dashes



Waves



Triangle Lattice



Custom

*Custom patterns are available.

TESSATILES

CONTENT:	P.E.T. 10% - 30%, Recycled Cotton 70% - 90%,
COMPONENTS:	1-1/2" and 1/2" Acoustic Substrate, AcoustiColor® Coating, Adhesive Hang Tab
DEPTH:	2"
THICKNESS TOLERANCE:	+ -1/4",
SIZES:	2' x 2' x 1-1/2"
FINISH OPTIONS:	AcoustiColor® Coating
FACE STYLE:	Dispersion, Polygon, Running Dashes, Wave, Chinese Lattice, Cellular, Triangle Lattice, Floral, Highways, Maze, Leaf Vein, Custom
APPLICATION:	Indoor Wall
CUTTING/ALTERATIONS:	N/A
INSTALLATION:	Adhesive Hang Tab
HANDLING/CARE:	When handling make sure hands are clean and oil free. Vacuuming or light brushing is recommended to prevent dust and soil buildup.
STORAGE:	Must be stored in a dry place. Delivery Packaging is not ideal for storage purposes. It is advised to place a polyethylene cover over the stack when packaging is removed, to reduce moisture absorption. It is recommended that product be stored horizontally. It is recommended that product should not be stacked. It is strongly recommended to avoid storage longer than 6 months. Do not allow water to come into direct contact with the material during storage. Store in a cool dry space 55°F-85°F.
FIRE RATING:	ASTM E84 Class A.
ACOUSTIC RATING:	NRC= 0.55 - 0.95

ACOUSTICOLOR® COATING **THE CUSTOM POSSIBILITIES ARE ENDLESS.**

There are 1,000's of color options to choose from Sherwin Williams' line of acoustical coatings. We can also match colors from other commercial paint manufacturers. Our coated acoustic products are made from recycled cotton and paper products which gives a unique textured finish.




AcoustiColor® Product Detail

*Color matching cannot be guaranteed across shipments from different orders and variation may be more pronounced beyond the normal commercial range.

AUDIMUTE TESSATILE

TEST REPORT

SOUND ABSORPTION REPORT
RAL-A17-297

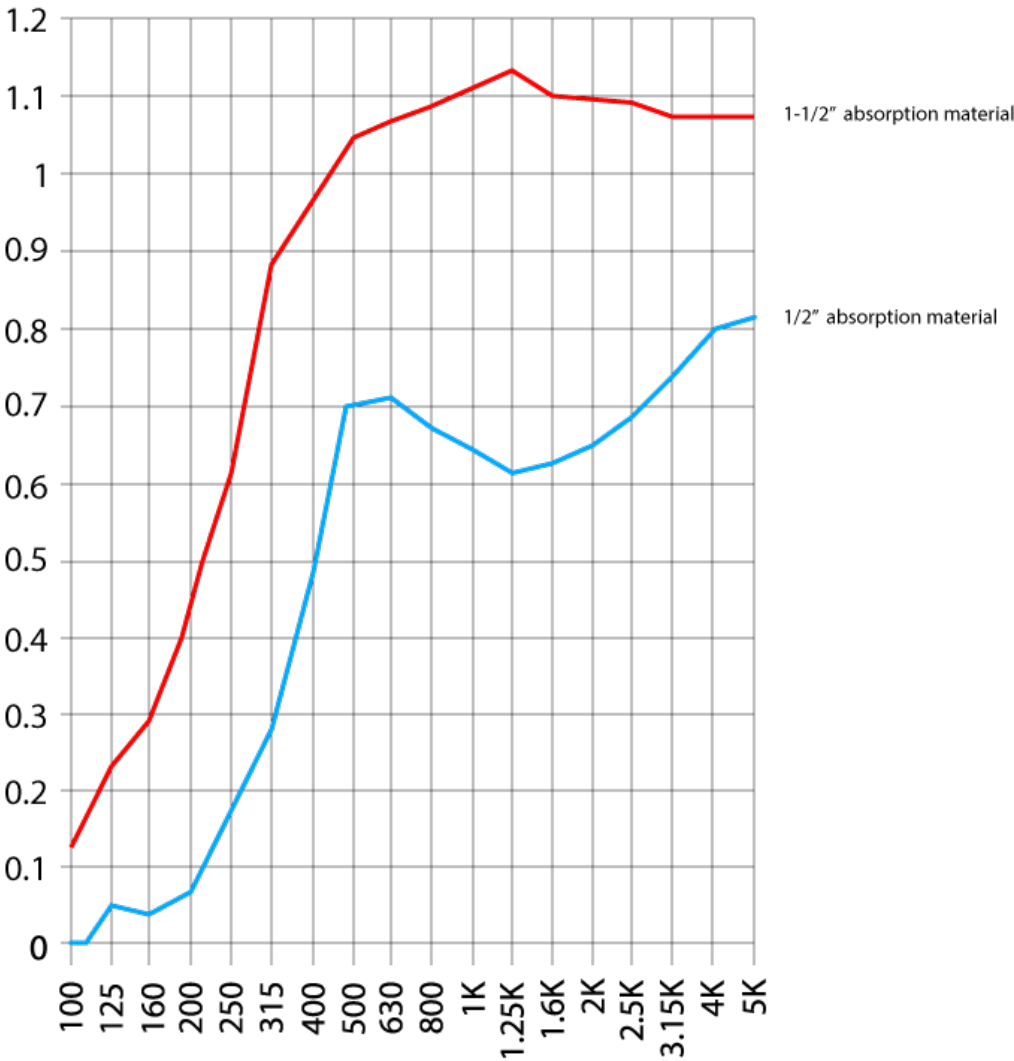

FREQUENCY (Hz)

SAA=0.52 - 0.97

NRC=0.55 - 0.95

TEST Report Audimute 2" TessaTile Product

The test report quotes the frequency dependent sound absorption data as well as the single number ratings. Data taken from Test Report RAL-A17-297 conducted by Riverbank Acoustical Laboratories. Complete test results are available upon request.

Adhesive Tab Installation Instructions:

AUDIMUTE ACOUSTIC FABRIC TILES

AUDIMUTE ACOUSTICOLOR® TILES

AUDIMUTE TESSATILES

ADHESIVE TAB:

